



## A Chisel Fertilizer for In-Soil Tree-Layer Site-Specific Application in Precision Farming

Sayakhat Nukeshev<sup>1\*</sup>, Kairat Yeskhozhin<sup>1</sup>, Dimitar Karaivanov<sup>2</sup>, Mikalai Ramaniuk<sup>3</sup>,  
Erzhan Akhmetov<sup>1</sup>, Bakhitbek Saktaganov<sup>1</sup>, Khozhakeldi Tanbayev<sup>1</sup>

<sup>1</sup>*Department of Technical Mechanics, S. Seifullin Kazakh Agromechanical University, Zhenis avenue 62, 010011 Astana, Kazakhstan*

<sup>2</sup>*Department of Applied Mechanics, University of Chemical Technology and Metallurgy, 8 Kl. Ohridski Blvd., 1797 Sofia, Bulgaria*

<sup>3</sup>*Department of Materials Mechanics and Machine Parts, Belarusian State Agrarian Technical University, 99/1, Nezavisimosti av, 220023, Minsk, Republic of Belarus*

**Abstract.** An original technical solution is proposed that permits the application of a main fertilizer dose once in 4-5 years at a depth of 6-25 cm with an inclined belt. The work aims to investigate the interaction between the proposed working tool (ripper-distributor) of the developed chisel-fertilizer with the soil, and to determine dependences that link its traction force with the design parameters. Studying the soil deformation pattern under the influence of working tool cutting parts based on classical mechanics made it possible to determine the dependence between the tractive force of the ripper-distributor and its design parameters. 3D modeling and C.F.D. analysis by using SolidWorks Flow Simulation<sup>®</sup> made it possible to define the fertilizer distributor parameters of the working body and flow characteristics of fertilizers. The distribution quality studies of fertilizer granules in compartments of the working tool distributor showed that the non-uniformity of distribution at different dosages (from 50 to 400 kg/ha) ranges from 7.8% for the application of granulated superphosphate up to 22.7% for the application of powdered superphosphate. The chisel-fertilizer enables soil-friendly and sloping site-specific fertilizer application at a depth from 5.6-9.8, 16-18, 23-25.8 cm, and a fertilizer distribution non-uniformity of 14-15% over the width of the spreader.

**Keywords:** Granular fertilizer; Liquid fertilizer; Precision farming; Site-specific application; Tractive force

### 1. Introduction

One way to adapt to climate change in the agricultural sector is by modifying the cropping system (Abella, Lansigan, and Tubay, 2021) at all technological processes. The most important of them is the application of fertilizers, and they should be provided in an environmentally friendly way. In addition, combining several technological operations in one farm unit passage (reducing the number of technological operations) decreases the risk of soil erosion (Gunawan, Sutjningsih, and Soeryantono, 2013).

Minimum and no-till cultivation technologies do not provide for the local application of higher doses of granular and liquid mineral fertilizers in the soil.

---

\*Corresponding author's email: [s.nukeshev@kazatu.kz](mailto:s.nukeshev@kazatu.kz), Tel.: +7-701-512-9791 Fax: +7 (7172) 31-60-72  
doi: [10.14716/ijtech.v14i1.5143](https://doi.org/10.14716/ijtech.v14i1.5143)

This leads to soil compaction, decreased soil fertility, and changes in layer soil structure from 0 to 30 cm (Pires *et al.*, 2017; Gao *et al.*, 2017). Research shows that an important factor for sustainable yields is optimal soil density. An increase of 0.1-0.3 g/cm<sup>3</sup> can reduce crop yields by 20–40% (Silva *et al.*, 2021; Ferreira *et al.*, 2020; Zarehaghi *et al.*, 2017; Nosalewicz and Lipiec, 2014). Without the extended reproduction of soil fertility, it is impossible to ensure progressive yield growth (Campolo *et al.*, 2021; Dai *et al.*, 2021; Imran, Amanullah, and M. Al-Tawaha, 2021). The analysis of long-term cropping practices in Kazakhstan and other countries shows that soils cultivated without the use of fertilizers, consequently soil fertility and yields decrease over time (Ren *et al.*, 2021; Man *et al.*, 2021; Nukeshev *et al.*, 2018). The grain legume crop rotations and vanguard technologies (Petrus *et al.*, 2020) can solve the problem of nitrogen replenishment, but phosphorus deficiency under conditions without in-soil site-specific application cannot be solved. The current state of cultivated soils shows that 80% of them do not contain mobile phosphorus and nitrogen (Nukeshev *et al.*, 2019; Kenenbaev *et al.*, 2018). Therefore, the first place to revive soil fertility is through a concern for the timely supply of soil with nutrients, and the most important role is the optimization of the nitrogen supply to plants (Nukeshev *et al.*, 2019; Zavalin and Sokolov, 2019; Antonova, 2018 Walsh and Christiaens, 2016).

The review of research works and advanced agricultural practices show that the issues related to mineral fertilizer application by scattering methods have been mainly resolved. However, the mechanical and technological basics of the tiered site-specific intra-soil application of granular and liquid mineral fertilizers have not been developed yet (Tanbayev *et al.*, 2022). Earlier studies (Eskhozhin *et al.*, 2014; Asaf *et al.*, 2007; Alonso-Marroquín and Herrmann, 2005; Aday and Ramadhan, 2019) did not consider issues of interaction of the working tool of the chisel fertilizer with the soil and dependencies connecting its tractive force with design parameters were not defined. Thus, developing technical means for the site-specific application of solid and liquid fertilizers into the soil and considering the nutrient stock in each elementary area of the field and potential yields is an urgent task. In this work, the interaction of the proposed inclined working body with the soil and the interaction between fertilizer granules and walls of the distributor that determine the optimal parameters of the chisel working body are considered.

The combination of inclined chiseling and the distribution of the main dose of fertilizers into several soil tiers provide solving of the soil compaction and depletion problems. Chiseling is a kind of deep no-till tillage, during which the soil is plowed with a narrow chisel located at the bottom of the ripper-distributor stand and, in the meantime, collapses down on the sides and in front of the stand at an angle of  $\approx 45^\circ$  (Seifullin, 2020).

This work aims to study the interaction between the cutting parts of the ripper-distributor and soil and determine the relationship between traction and design parameters of the working tool. The working tool and soil interaction are understood as a dihedral wedge impact on the soil when it moves in soil with a certain speed and force.


## 2. Methods

Theoretical investigations were based on the laws of classical mechanics. In order to verify the obtained theoretical calculation results and determine the traction resistance of the chisel-fertilizer working tool, the laboratory experiments were conducted in the soil channel at a fertilizer depth of 30 cm and a driving speed of 0.87 to 3.1 m/s. A measuring information system with data output to a personal computer and an electronic dynamometer with the maximum permissible relative error of  $\pm 0.45\%$  (DEP3-1D-10P-2) were used in laboratory experiments.

Experiments were conducted with granular and powdered superphosphate. Before conducting experiments, humidity, granulometric composition, and bulk density of fertilizers were determined. The bulk density of powdered superphosphate was 0.81–0.83 t/m<sup>3</sup>. The bulk density of granulated superphosphate is 0.94–0.95 t/m<sup>3</sup>. The size of the granules is 1–5 mm; the humidity varied within 2.5–3.5 %.

### 2.1. Design of the working tool of chisel fertilizer

Thus, we propose a chisel-fertilizer (Figure 1a), which performs a layer-by-layer local application of granular or liquid fertilizer to a working depth of from 5–8, 16–18 and 23–25 cm. During operation, the working tool lifts and shifts the layer and breaks up and crushes compacted soil areas (Figure 1b). The design of the working tool permits minimal furrowing. The working tools are the paraplow type in which the working part (1) is inclined at an angle of 40–45° to the vertical. This shape of the working tool enables high-quality cultivation of compacted soils with maximum retention of stubble.

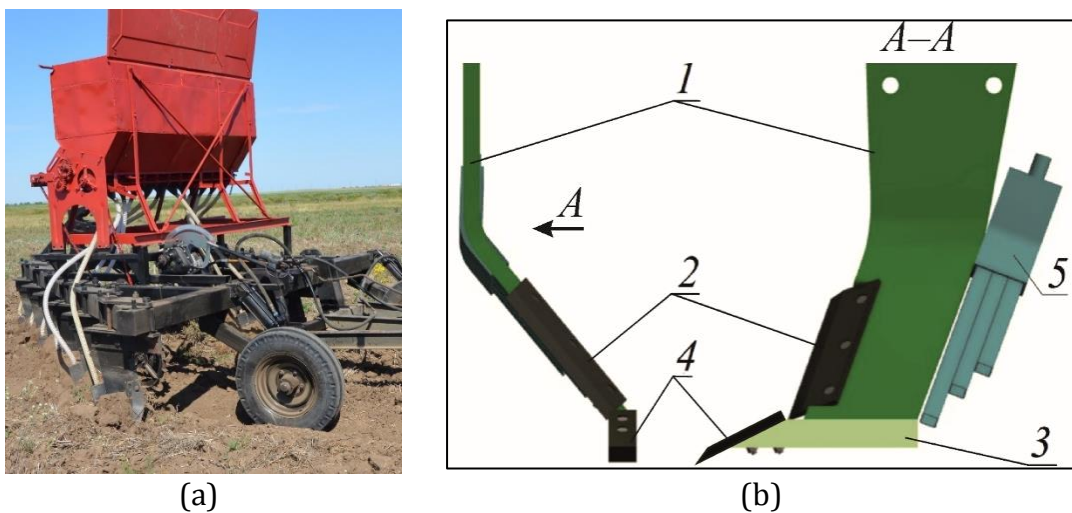

1 - stand, 2 - plate, 3 - shoe, 4 - chisel, 5 - fertilizer distributor

**Figure 1** Experimental chisel-fertilizer


At the end of the stand (1) of the chisel fertilizer, there is a fixed shoe (3) to which the chisel (4) is bolted. On the front side of the stand (1), the wedge-shaped cutting plate (2) is fixed. On the back is the rectangular distributor of mineral fertilizers (5), which provides uniform distribution of fertilizers in the soil with an oblique strip at a depth of 6–8, 16–18, and 23–25 cm. The wedge-shaped cutting plate (2), which is fixed in the inclined part of the stand (1), has an area that is 2.2–2.5 times smaller on the downward-directed side than the area on the upward-directed side. The rectangular fertilizer distributor (5) is flush with the upward side surface of the stand (1), and in relation to the downward-sloping side surface of the stand (1), the lower outer sloping side surface is shifted 2–3 mm toward the upward-sloping side surface of the stand (1).

## 3. Results and Discussion

### 3.1. Determining the tractive force

#### 3.1.1. Calculation model

The cross-section of the working tool is a dihedral wedge with a front edge at a cutting angle  $\alpha$  to the direction of travel and the other along the direction of travel (Figure 4).

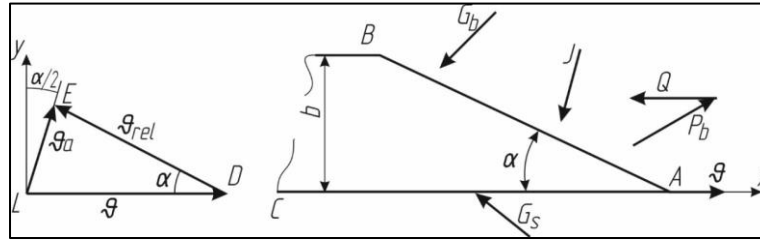

**Figure 2** Interaction of the ripper-distributor’s working tool with the soil

The implement moves in the soil at speed  $v$  (m/s) and acts on it with force  $P_b$  (N), resulting from normal and friction forces on the blade face. The soil resists the movement of the ripper-distributor through the following forces:

$Q$  – soil layer resistance in front of the ripper-distributor;


$J$  – dynamic impact of soil on the working body;

$G_b$  – soil layer resistance on the front edge of the blade; and

$G_s$  – lateral impact of soil layer on the second edge.

The lateral impact can also occur on the second edge after point  $B$ . Obviously, this force is much smaller than the others, so it can be disregarded.

Forces  $P_b$ ,  $G_b$  and  $G_s$  are directed at an angle of friction to the normal surface (Figure 5) and characterize the soil resistance to deformations arising in it due to the impact of the ripper-distributor tool. The resistance of the soil layer at the front is directed against the movement of the working device.

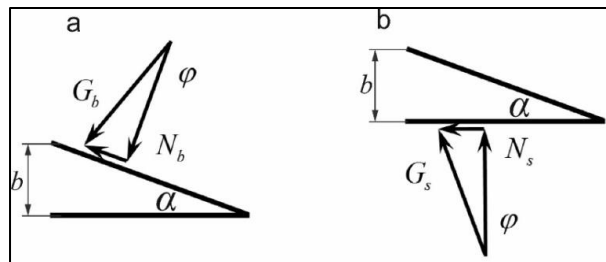

**Figure 3** Determination of the direction of soil deformation reactions on the blade (a) and the lateral face (b)

The dynamic disturbance of the deformed soil  $J$  represents a cyclic impact of soil particles on the working tool of the ripper-distributor. It is directed to the beginning of the blade. This is because the soil particles hit the surface of the ripper-distributor and reach the absolute velocity  $v_a$  (m/s). Consequently, the dynamic disturbance must be directed in the opposite direction to the absolute velocity of the soil particles and act on the blade's tip. The ripper-distributor velocity is known, and consequently the movement of soil particles over the wedge surface must be equal to the velocity:  $v_{rel} = v$ . It should also be noted that the type of fertilizer used does not affect the traction performance of the implement, as the fertilizer flows inside the distributor.

**3.1.2. Theoretical solution**

Determine the pulling force of the tool as it moves in the soil. Consider the speed triangle (Figure 2  $\Delta DLE$ ). Based on this, we have:

$$\frac{v_a}{\sin \angle D} = \frac{v}{\sin \angle E}; \quad v_a = v \frac{\sin \angle D}{\sin \angle E} \tag{1}$$

where  $\angle D = \angle \alpha; \quad \angle E = \angle L = \frac{\pi}{2} - \frac{\alpha}{2}$ .

Substitute into (1) the values of the angles

$$v_\alpha = v \sin \alpha \cdot \frac{1}{\sin(\frac{\pi}{2} - \frac{\alpha}{2})} \tag{2a}$$

$$v_\alpha = 2 v \sin \frac{\alpha}{2} \tag{2b}$$

From the last expression and Figure 4, the absolute speed of the particles  $v_a$  will be directed at an angle  $\alpha/2$  to the direction of the  $x$ -axis.

By composing and solving the equations of equilibrium of the forces acting to the  $x$ , and  $y$ -axes directions, eventually, it was obtained the dependence of the traction force  $P_b$  on the following parameters: the working body cutting angle ( $\alpha$ ); friction angle ( $\varphi$ ); blade length, and the side edge of the wedge ( $l$ ); the working body width ( $b$ ); working depth ( $h$ ); the working body velocity ( $v$ ) and the soil density ( $\rho$ ).

The theoretical solution and calculation have determined the equation of the tractive force  $P_b$  (3):

$$P_b = \frac{v^2}{2} b \cdot h \cdot \rho \cdot \sin 2\alpha \frac{A}{B} \tag{3}$$

Here  $A$  and  $B$ :

$$A = \frac{\tan \frac{\alpha}{2}}{l_s - l_b \frac{\cos(\alpha + \varphi)}{\cos \varphi}} + l_b \cdot h \frac{\sin(\alpha + \varphi)}{\cos \varphi} + l_s \cdot \tan \varphi + b \tag{4}$$

$$B = \frac{\sin(\alpha + \varphi)}{l_s - l_b \frac{\cos(\alpha + \varphi)}{\cos \varphi}} - \cos(\alpha + \varphi) \left( l_b \frac{\sin(\alpha + \varphi)}{\cos \varphi} + l_s \cdot \tan \varphi + b \right) \tag{5}$$

The resulting equation (3) shows that the traction resistance  $P_b$  of the implement has a proportional relationship to the width  $b$ , working depth  $h$ , and cutting angle  $\alpha$  of the working tool and a quadratic relationship to its forward speed  $v$ . At a working depth of  $h = 0.3$  m and a working width of  $b = 0.45$  m, the traction force varied within  $P_b=906.2 - 4038.5$  N (Table 1).

**Table 1** Tractive forces  $P_b$ (N) depending on machine speed  $v$ (m/s) and cutting angle  $\alpha$  (deg)

$v \backslash \alpha$	16	18	20	22	24
1.4	906.15	1022.88	1139.9	1257.06	1374.2
1.6	1183.54	1136.00	1488.85	1641.87	1794.87
1.8	1497.91	1690.88	1884.32	2077.99	2271.63
2.0	1849.28	2087.51	2326.33	2565.42	2804.49
2.2	2237.62	2525.88	2814.85	3104.16	3393.43
2.4	2662.96	3006.01	3349.91	3694.21	4038.46

To minimize the traction force at the working depth of  $h = 0.25\text{--}0.35\text{m}$  and when working width of one tool  $b = 0.40\text{--}0.45\text{m}$ , the following is recommended:

- cutting angle  $\alpha = 16\text{--}20^\circ$ ;
- travel speed of the working tool  $v = 1.8\text{--}2.0\text{m/s}$ .


### 3.2. Study of irregularity in fertilizer distribution

#### 3.2.1. Fertilizer flow simulation model

The flow of fertilizer granules in the distributor was modeled using a C.F.D. software – SolidWorks Flow Simulation®. The process of movement of the mineral fertilizer granules without air supply in the distributor was simulated, and three-dimensional trajectories of the movement in the calculation model (streamlines, fields and indicators of velocity and pressure) were received.

From the positions of streamlines and the field of granule velocities, we observed that the position of the lines in the upper part of the distributor is straight, with a deflection of the jump and wave lines increasing as the mineral fertilizer mass approaches compartments (outlets). In the distributor's lower part, the granule discharge velocities are approximately the same. This pattern of movement of the fertilizer mass results in a more uniform distribution of granules in outlets of the distributor and uniform distribution of granules at different depths. Analysis of the fertilizer granules' movement due to gravity in the distributor show that the highest velocity and high number of granules sown occurs in the second compartment, and the lowest velocity and number of granules sown occurs in the third compartment. The particle velocity and the number of grains by compartments are shown in Figure 4: in the first compartment –  $n_1 = 266$  and  $v_1 = 1.661\text{...}3.098\text{ m/s}$ ; in the second compartment –  $n_2 = 269$ , and  $v_2 = 2.480\text{...}4.964\text{ m/s}$ ; in the third compartment,  $n_3 = 235$  and  $v_3 = 0.05\text{...}1.243\text{ m/s}$ .

The analysis of particle movement in the third compartment show that in the upper part of the distributor, particles falling out of the distributor's neck hit the walls of windows of the lower part of the distributor due to gravity. Furthermore, since the distributor is mounted obliquely to the working tool, there is an accumulation of granules at the third compartment's entrance, which decreases the granule flow rate through the compartment and reduces the number of seeded granules.

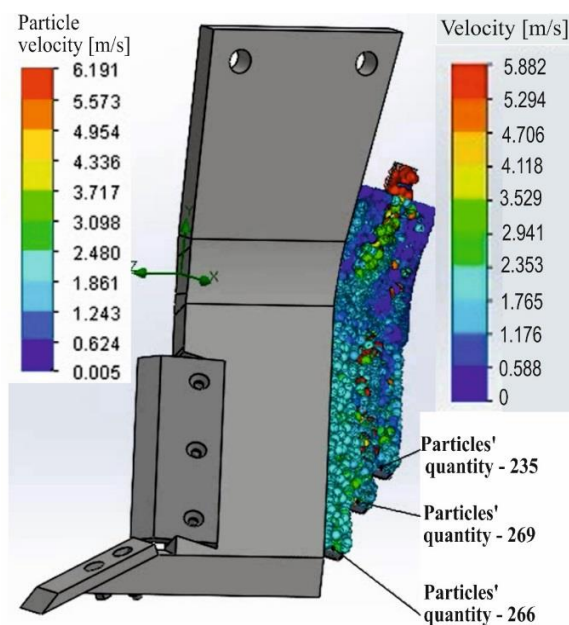


**Figure 4** Particle velocity and flow path in the distributor

### 3.3. Experimental evaluation of results

The laboratory tests of the working tool in the soil channel showed that the force of a single tool at a depth of 0.30 m is 1870 N, which confirms satisfactory agreement of the data from theoretical and experimental studies (95.5%).

To check the quality of mineral fertilizers distribution over the distributor compartments a laboratory stand was developed that allows different rates of fertilizer to be applied to the spreader tube.

Analysis of the results show that when varying fertilizer doses between 50-400 kg/ha, the non-uniformity of the granular distribution in the compartments varies between 7.8% for the application of granular superphosphate (curve 1), and 22.7% for the application of powdered superphosphate (curve 2) (Figure 5).

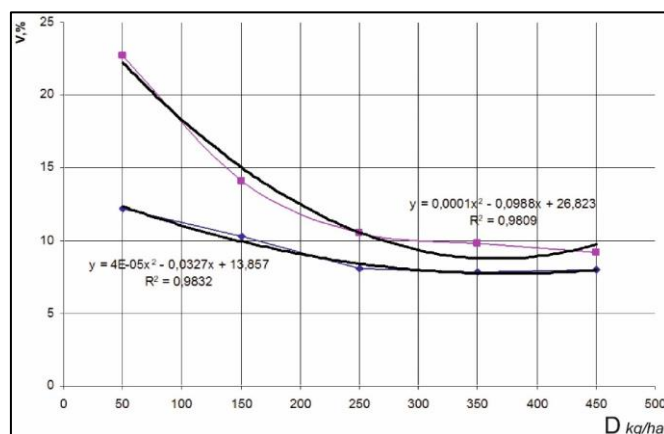

**Figure 5** Uneven distribution of the fertilizer across compartments as a function of fertilizer dose

At application rates of 200–400 kg/ha, the non-uniformity of the seed, which varies between 8%–10%, is drastically reduced. This is achieved through the design of the distributor, which has a sloping part (head) with a rectangular cross-section. In this part of the distributor, the chaotically moving granular flow receives a uniform, set-like movement along the rectangular cross-section and is distributed in equal portions to the compartments. At this point, it should be noted that using the head with other types of cross-sections has not yielded positive results, even at higher dosages. For example, when a circular cross-section, the granules accumulated in the lower part due to the concave surface, and most of the granules fell into the middle compartment. The use of vertical pipes also did not affect the distribution quality. Laboratory and field tests were conducted under two conditions at 5.82 and 8.77 km/h. The soil moisture in the test plot was 18.9%. Under the noted conditions, the ripper-distributor ensures tillage to a depth of 32–35 cm with fertilizer application in form of inclined belt with a width of 25–29 cm.

### 3.4. Analysis of results

The cultivator-fertilizer RUN-4 "Mineral", designed for applying mineral fertilizer (50–480 kg/ha) and deep tillage to a depth of 25–30 cm, was chosen as a comparative machine. In this process, fertilizer granules are applied in a horizontal band with a width of 5–6 cm to a depth of 20.3–21.1 cm. The comparative quality indicators of the process performance are shown in Table 2.

**Table 2** Comparison of the quality of the process for layer-by-layer differentiated fertilizer granule application in form of an inclined belt

Name of indicators	Fertilizing equipment	
	RUN-4 Mineral	Proposed
Machine speed, m/s	2.44	2.44
Capacity of the machine, kg/s	0.015...0.06	0.013...0.06
Fertilizer application rate, kg/ha:		
maximum	480	480
minimum	50	50
Application rate irregularity, %	14.22	12.6
<b>Uneven distribution of fertilizer across the width of the spreader, %</b>	<b>48.3</b>	<b>14.2...14.8</b>
Depth of embedment, cm	20.3...21.1	5.6...25.8
Fertilizer belt width, cm	5...6	32...35

One of the most important indicators of distributor quality is the distribution uniformity of the material over the entire width of seeding. The experimental distributor's application rate irregularity is 14.2 to 14.8%, which is lower than its counterpart. A laboratory study of site-specific liquid fertilizer application is the aim of further work to standardize the chisel fertilizer.

#### 4. Conclusions

The design of a working tool for intra-soil application of fertilizers was developed, and the dependence of traction force on its design parameters was obtained. Optimal cutting angle  $\alpha=16-20^\circ$  and machine speed  $v=1.8-2.0$  m/s were determined based on the minimum tractive force. Laboratory tests in the soil trench show that the traction force of a single working tool at a depth of 0.30 m is 1870 N, which confirms satisfactory convergence of data from theoretical and experimental studies (95.5%). The verification of the quality of mineral fertilizer distribution in the compartments of the working tool showed that the distribution non-uniformity of the of fertilizer grains when changing dose  $D$  from 50 to 400 kg/ha varied from 7.8% to 22.7%. The laboratory and field tests showed that the designed chisel-fertilizer ensures the processing and sloping of fertilizers with a bandwidth up to 35 cm to a depth of 5.6-25.8 cm with 14-15% non-uniformity over the width of the spreader. A laboratory study of site-specific liquid fertilizer application is the aim of further work to standardize the chisel fertilizer.

#### Acknowledgments

The authors are grateful to the Ministry of Agriculture of the Republic of Kazakhstan for funding the scientific work. This research has been funded by the Department of Strategic planning and Analysis of the Ministry of Agriculture of the Republic of Kazakhstan (Grant No. BR06349506-OT-20, 2018-2020).

#### References

- Abella, G.P.L., Lansigan, F., Tubay, J., 2021. Agricultural land use allocation under current and projected scenarios. *International Journal of Technology*, Volume 12(5), pp. 975–988
- Alonso-Marroquín, F., Herrmann, H.J., 2005. The incremental response of soils. An investigation using a discrete-element model. *Journal of Engineering Mathematics*, Volume 52(1), pp.11–34



- Antonova, O.I., 2018. Effectiveness of liquid nitrogen fertilizers for spring wheat and oil-bearing crops // Rural Sibiri. No. 4 (07), pp. 66–67. Available online at: <http://www.ids55.ru/ss/articles/132-2018-10-15-09-40-28/4324-2018-10-15-09-48-05.html>
- Asaf, Z., Rubinstein, D., Shmulevich, I., 2007. Determination of discrete element model parameters required for soil tillage. *Soil and Tillage Research*, Volume 92(1-2), pp. 227–242
- Aday, S.H., Ramadhan, M.N., 2019. Comparison between the draft force requirements and the disturbed area of a single tine, parallel double tines and partially swerved double tines subsoilers. *Soil and Tillage Research*, Volume 191, pp. 238–244
- Campolo, J., Güereña, D., Maharjan, S., Lobell, D.B., 2021. Evaluation of soil-dependent crop yield outcomes in nepal using ground and satellite-based approaches. *Field Crops Research*, Volume 260, p. 107987
- Dai, X. L. Song, D., Zhou, W., Liu, G., Liang, G., He, P., Sun, G., Yuan, F., Liu, Z., Yao, Y., Cui, J., 2021. Partial substitution of chemical nitrogen with organic nitrogen improves rice yield, soil biochemical indicators and microbial composition in a double rice cropping system in south China. *Soil & Tillage Research*, Volume 205, p. 104753
- Eskhozhin, D., Nukeshev, S., Eskhozhin, K., Karaivanov, D., 2014. Stress distribution in soil under action of paraplow cultivator. *Life science journal*, Volume 11(2s), pp. 20–24
- Ferreira, C.J.B., Tormena, C.A., Severiano, E.D.C., Zotarelli, L., Betioli Júnior, E., 2020. Soil compaction influences soil physical quality and soybean yield under long-term no-tillage. *Archives of Agronomy and Soil Science*, Volume 67(3), pp. 383–396
- Gao, L., Becker, E., Liang, G., Houssou, A.A., Wu, H., Wu, X., Cai, D., Degré, A., 2017. Effect of different tillage systems on aggregate structure and inner distribution of organic carbon. *Geoderma*, Volume 288, pp. 97–104
- Gunawan, G., Sutjningsih, D., Soeryantono, H.W, S., 2013. Soil erosion estimation based on GIS and remote sensing for supporting integrated water resources conservation management. *International Journal of Technology*, Volume 4(2), pp. 157–166
- Imran, Amanullah, M. Al-Tawaha, A.R., 2021. Carbon sources application increase wheat yield and soil fertility. *Communications in Soil Science and Plant Analysis*, Volume 52(7), pp.695–703
- Kenenbaev, S.B., Ramazanova, S.B., Suleimenov, E.T., Gusev, V.N., 2018. Application of mineral fertilizers in land cultivation of the Republic of Kazakhstan. *Soil Science and Agrichemistry*. Volume 3, pp. 31–40
- Nosalewicz, A., Lipiec, J., 2014. The effect of compacted soil layers on vertical root distribution and water uptake by wheat. *Plant and Soil*, Volume 375(1), pp. 229–240
- Nukeshev, S., Mamyrbayeva, I., Balabekova, A., Zhaksylykova, Z., Eskhozhin, K., 2018. The results of theoretical studies of the vibrator compensating chamber of the dispenser of mineral fertilizers. *Journal of Engineering and Applied Sciences*, Volume 13(1), pp. 130–136
- Nukeshev S., Eshozhin D.Z., Romanjuk N.N., Akhmetov E.S., Tleumbetov K.M., Kostabekova D.Sh., Saktaganov B.J., 2019. Technological and technical solutions of the basic dose of mineral fertilizers in precision agriculture system in conditions of Northern Kazakhstan. *News of Science of Kazakhstan*, Volume 2, pp. 120–124
- Man, M., Deen, B., Dunfield, K.E., Wagner-Riddle, C. and Simpson, M.J., 2021. Altered soil organic matter composition and degradation after a decade of nitrogen fertilization in a temperate agroecosystem. *Agriculture, Ecosystems and Environment*, Volume 310, p. 107305

- Pires, L.F., Borges, J.A., Rosa, J.A., Cooper, M., Heck, R.J., Passoni, S., Roque, W.L., 2017. Soil structure changes induced by tillage systems. *Soil and Tillage Research*, Volume 165, pp. 66–79
- Petrus, H.T.B.M., Putera, A.D.P., Wangi, I.P., Ramadhian, M.A., Setiawan, H., Prasetya, A., 2020. Characterization of nitrogen release in modified controlled-release-fertilizer using rice husk biochar. *International Journal of Technology*, Volume 11(4), pp. 774–783
- Ren, F., Misselbrook, T.H., Sun, N., Zhang, X., Zhang, S., Jiao, J., Xu, M., Wu, L., 2021. Spatial changes and driving variables of topsoil organic carbon stocks in chinese croplands under different fertilization strategies. *Science of the Total Environment*, Volume 767, p. 144350
- Seifullin, S., 2020. *Patent 34515 RK. Soil tillage tool (No.2019/0368.1)*. K.A.T.U.
- Silva, J.F.G., de Souza Linhares, A.J., Goncalves, W.G., de Pinho Costa, K.A., Tormena, C.A., Silva, B.M., de Oliveira, G.C., da Costa Severiano, E., 2021. Are the yield of sunflower and paiaguas palisadegrass biomass influenced by soil physical quality? *Soil and Tillage Research*, Volume 208, p. 104873
- Tanbayev, K., Nukeshev, S., Sugirbay A., 2022. Performance evaluation of tillage knife discharge microchannel. *Acta Technologica Agriculturae*, Volume 25(4), pp. 169–175
- Walsh, O.S., Christiaens, R.J., 2016. Relative Efficacy of Liquid Nitrogen Fertilizers in Dryland Spring Wheat. *International Journal of Agronomy*. Volume 2016. pp. 252-260
- Zarehaghi, D., Neyshabouri, M.R., Gorji, M., Hassanpour, R., Bandehagh, A., 2017. Growth and development of pistachio seedling root at different levels of soil moisture and compaction in greenhouse conditions. *Soil and Water Research*, Volume 12(1), pp. 60–66
- Zavalin A.A., Sokolov O.A., 2019. Utilization by plants of nitrogen fertilizer and its regulation. *International Agricultural Journal*, Volume 4(370), pp. 71–75